


报告编号: 20211204-PG36555246000-99.5K-SZYT	客户: SZYTD	电机型号: PG36555246000-99.5K
变频器变比(电机/输出): 99.5/1	特性参数: /	样机转向: 逆时针 (CCW)
样机编号: 1	报告序号: 1	

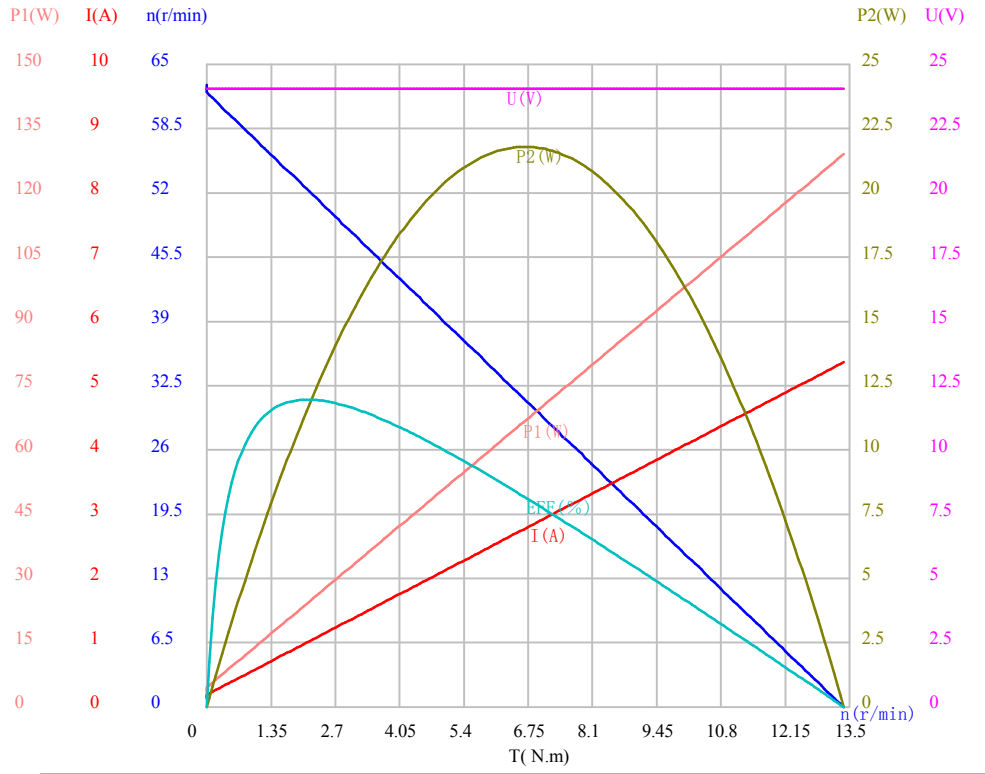

特征点	U(V)	I(A)	P1(W)	T(N.m)	n(r/min)	P2(W)	EFF(%)	P.F
No Load	24.05	0.132	3.179	0.00	62.9	0.000	0.000	0.999
Stall	24.05	5.367	129.1	13.38	0	0	0.000	0.999
Max T	24.05	5.367	129.1	13.38	0.0	0.000	0.000	0.999
Max P2	24.05	2.763	66.45	6.65	31.2	21.79	32.80	0.999
Max Eff	24.05	1.000	24.06	2.09	52.4	11.51	47.84	0.999
额定点	****	****	****	****	****	****	****	****

U(V)	I(A)	P1(W)	T(N.m)	n(r/min)	P2(W)	EFF(%)	P.F
24.05	0.132	3.179	0.00	62.9	0.000	0.000	0.999
24.05	0.263	6.343	0.19	61.3	1.222	19.28	0.999
24.05	0.395	9.506	0.53	59.7	3.318	34.91	0.999
24.05	0.526	12.67	0.87	58.1	5.301	41.84	0.999
24.05	0.658	15.83	1.21	56.5	7.172	45.30	0.999
24.05	0.790	19.00	1.55	54.9	8.930	47.01	0.999
24.05	0.921	22.16	1.89	53.4	10.58	47.72	0.999
24.05	1.053	25.32	2.23	51.8	12.11	47.81	0.999
24.05	1.184	28.49	2.57	50.2	13.53	47.49	0.999
24.05	1.316	31.65	2.91	48.6	14.84	46.88	0.999
24.05	1.447	34.81	3.25	47.0	16.03	46.05	0.999
24.05	1.579	37.98	3.59	45.5	17.11	45.06	0.999
24.05	1.710	41.14	3.93	43.9	18.08	43.96	0.999
24.05	1.842	44.30	4.27	42.3	18.94	42.75	0.999
24.05	1.973	47.47	4.61	40.7	19.69	41.48	0.999
24.05	2.105	50.63	4.95	39.1	20.32	40.13	0.999
24.05	2.237	53.80	5.29	37.6	20.84	38.74	0.999
24.05	2.368	56.96	5.63	36.0	21.25	37.30	0.999
24.05	2.500	60.12	5.97	34.4	21.54	35.83	0.999
24.05	2.631	63.29	6.31	32.8	21.72	34.33	0.999
24.05	2.763	66.45	6.65	31.2	21.79	32.80	0.999
24.05	2.894	69.61	6.99	29.7	21.75	31.25	0.999
24.05	3.026	72.78	7.33	28.1	21.60	29.68	0.999
24.05	3.157	75.94	7.67	26.5	21.33	28.09	0.999
24.05	3.289	79.10	8.01	24.9	20.95	26.48	0.999
24.05	3.420	82.27	8.35	23.3	20.45	24.86	0.999
24.05	3.552	85.43	8.69	21.8	19.85	23.23	0.999
24.05	3.684	88.59	9.03	20.2	19.13	21.59	0.999
24.05	3.815	91.76	9.37	18.6	18.30	19.94	0.999
24.05	3.947	94.92	9.71	17.0	17.36	18.29	0.999
24.05	4.078	98.08	10.05	15.4	16.30	16.62	0.999
24.05	4.210	101.2	10.39	13.9	15.13	14.95	0.999
24.05	4.341	104.4	10.73	12.3	13.85	13.27	0.999
24.05	4.473	107.6	11.07	10.7	12.46	11.58	0.999
24.05	4.604	110.7	11.41	9.1	10.95	9.891	0.999
24.05	4.736	113.9	11.75	7.5	9.335	8.195	0.999
24.05	4.867	117.1	12.09	6.0	7.604	6.495	0.999
24.05	4.999	120.2	12.43	4.4	5.760	4.791	0.999
24.05	5.131	123.4	12.77	2.8	3.804	3.083	0.999
24.05	5.262	126.6	13.11	1.2	1.735	1.371	0.999
24.05	5.367	129.1	13.38	0.0	0.000	0.000	0.999