




用途/Typical applications: 监控云台/云台、烘烤架、烤炉、清洗机、垃圾处理器、捆钞机、医疗食品、稳压器、游戏机、灌流泵、办公设备、家用电器

Pan/Tilt camera, Grill, Oven, Cleaning machine, Garbage disposers, Packing bank note machine, Coffee machine, Medical machine, Manostat, Amusement equipment, infusion pumps, Office equipment, Household appliances, Automatic actuator.

外形尺寸 APPEARANCE SIZE

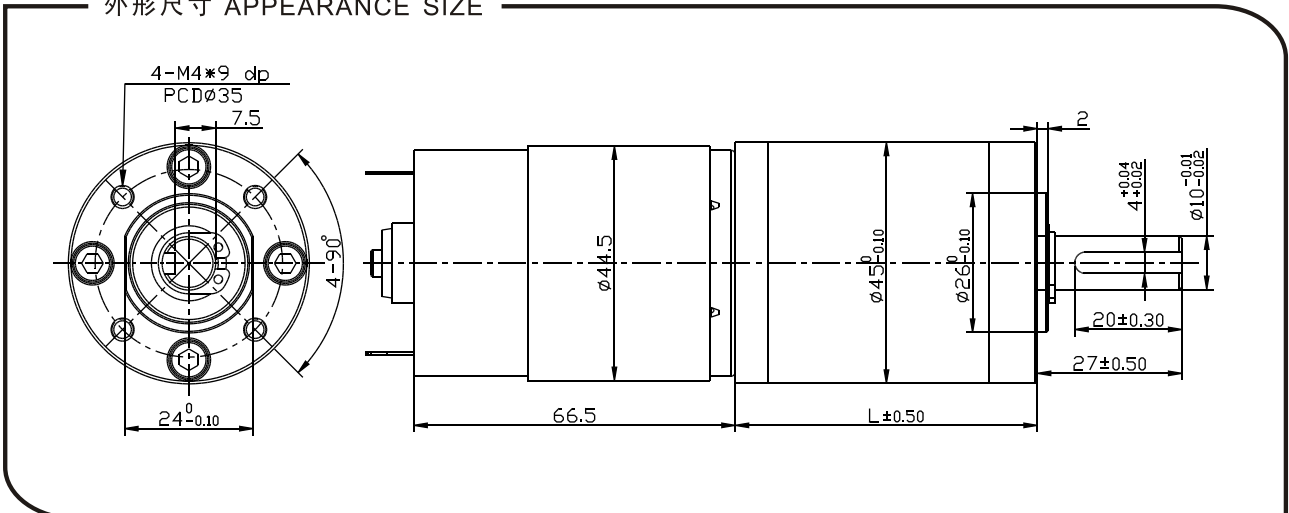

齿轮箱数据 Gearbox data

减速箱级数 Number of stages	1 减速比 Stages reduction	2 减速比 Stages reduction	3 减速比 Stages reduction	4 减速比 Stages reduction	5 减速比 Stages reduction
减速比 Reduction ratio	3.7	10.2、13.7、19.2	32.5、50.9、71.2、99.5	139、188、264、369、516	699、977、1367、1911、2672、3736
减速比 Reduction ratio	33.6	44.9	56.2	67.5	78.8
最大运转力矩 Max. Running torque	20kgf.cm	60kgf.cm	120kgf.cm	120kgf.cm	120kgf.cm
最大破坏力矩 Max. Gear breking torque	60kgf.cm	180kgf.cm	360kgf.cm	360kgf.cm	360kgf.cm
最高齿轮效率 Max. Gearing efficiency	90%	81%	73%	65%	59%

其它减速比请致电或邮件给我司技术部 Other reduction ratio please telephone or e-mail to our engineering department.

马达参数 Motor data

马达型号 Motor Model	电压 Rated Volt. V	空载 No load		负载 Load torque				堵转 Stall torque	
		电流 Current	转速 Speed	电流 Current	转速 Speed	扭矩 Torque	输出功率 Output power	扭矩 Torque	电流 Current
		mA	r/min	mA	r/min	gf.cm	W	gf.cm	A
RS-775123000	12	≤420	3000	≤1300	2430	408	10.4	2484	6.7
RS-775124500	12	≤750	4500	≤2100	3710	476	17.6	2714	10.4
RS-775126000	12	≤1300	6000	≤3500	5195	478	25.5	3129	18.6
RS-775243000	24	≤210	3000	≤600	2590	364	9.87	2050	3.2
RS-775244500	24	≤480	4500	≤1300	3850	482	18.5	3335	5.3
RS-775246000	24	≤630	6000	≤2100	5233	574	30.8	4565	12.1

- 马达和齿轮箱装配成减速电机后输出扭矩 = 马达扭矩X减速比X齿轮效率; 输出转速 = 马达转速 / 减速比 .
- After connecting motor and gearbox which is named gearmotor the output torque: motor torque X reduction ratio X gearing efficiency; output speed: motor speed/reduction ratio .